Assembly Instruction:


LIEBHERR HS 885 HD - Rope excavator

Item no. 2831

- 2. Unwind the rope almost entirely.
- 3. Reeve the rope as shown on the picture.

1. Remove the adhesive strip from the rear rope drum.



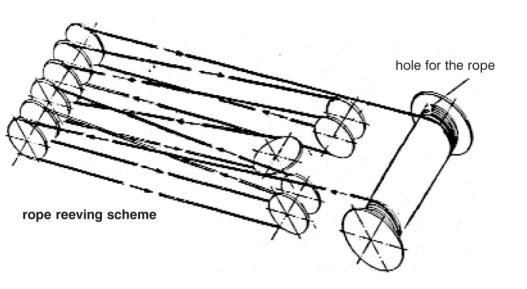

- 4. Now thread the top of the rope after reeving in the visible hole of the rope drum and wind the rope up.
- 5. Attach now the two extension lattice boom sections and the lattice boom top to the ground part.
- 6. Enclosed find 6 ropes. Two of them are to be pushed with the hooks in the loops on the boom top on each side. Expand the anchoring with the remaining 4 ropes by pressing two loop sides on the assigned hooks of the balance at the A-block. Lift the boom while doing this as much as necessary.
- 7. The boom is now infinite variable by using the crank on the rope drum.
- 8. Finally pull the remaining rope being winded upon the big rear drum over the boom and the pulleys and tie it on the hook.